



PERFORMANCE PLUS OILS AND LUBRICANTS
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

FULL SYNTHETIC MULTI-VEHICLE AUTOMATIC TRANSMISSION FLUID

Performance Plus® Full Synthetic Multi-Vehicle Automatic Transmission Fluid is specially formulated with a unique combination of synthetic base stocks and an advanced additive technology to ensure peak performance in the latest automatic transmissions. This premium quality product is further enhanced to meet and exceed the frictional and wear requirements of most automatic transmissions regardless of age. Full Synthetic Multi-Vehicle Automatic Transmission Fluid carries formal approval of MERCON® LV and DEXRON® VI, recognized by both Ford Motor Company and General Motors for performance and protection.

PERFORMANCE PLUS PROPERTIES	
Kinematic Viscosity cSt @ 40°C cSt @ 100°C	28.7 5.9
Viscosity Index	154
Brookfield Viscosity cP @ -40°C	10,200
Copper Corrosion	1B
API Gravity	31.5
Specific Gravity 15.6°C (60°F)	0.868
Flash Point, °C (°F)	208 (406)
Pour Point, °C (°F)	-51 (-60)
Color	Red

Note: Values shown above are representative of current production and may vary within modest ranges

Not recommended for DCT or CVT Transmissions

**Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.

Approvals and Specifications

Performance Plus® Full Synthetic Multi-Vehicle ATF has been formally approved to meet the following specifications:

MERCON® LV	License #MLV160802
DEXRON® VI	License #J-60187

Since Performance Plus® Full Synthetic Multi-Vehicle ATF meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable**):

Chevrolet	General Motors
Lexus	Acura
Lincoln	Kia
Mazda	Fiat
GMC	Infiniti
Dodge	Jeep
Chrysler	Volvo
Buick	Subaru
Land Rover	Jaguar
Cadillac	Mercedes-Benz
Volkswagen	BMW
Mitsubishi	Volvo

*A full list of Applications is listed on Page 3



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

FULL SYNTHETIC MULTI-VEHICLE AUTOMATIC TRANSMISSION FLUID


Features and Benefits: Performance and Protection in modern transmissions and demanded by drivers, and those who demand the best for their vehicle demand Performance Plus Automatic Transmission Fluid. Our product has been tested, proven and is trusted to deliver the very best in the industry. In addition, Performance Plus Automatic Transmission Fluid delivers:

- Formulated to protect against oxidation
- Superior additives to enhance friction properties
- Excellent anti-wear protection
- Thermally stable formulation
- Outstanding low temperature performance

- Protecting for bushings, gears and clutch plates
- Avoiding clutch shudder and slippage
- Extending the life of the transmission
- Performing in extreme temperature conditions
- Essential protection to vital transmission components

Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.

Brookfield Viscosity

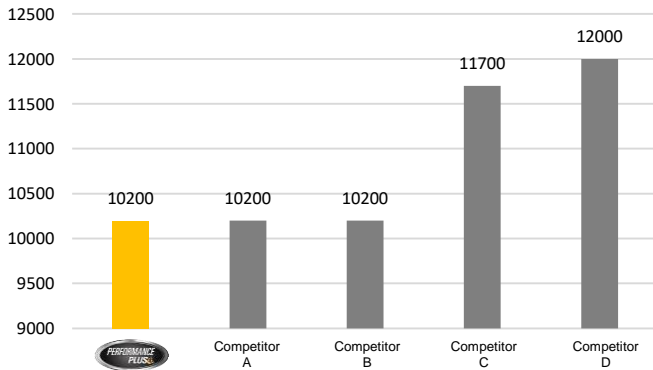

Performance Plus® delivers superior lubrication flow to vital components faster and more efficiently thus significantly reducing critical transmission wear during cold temperature operation.

Wear and Temperature



The image on the left shows damage from wear, and the image on the right show the protection provided by Performance Plus.

The greatest amount of wear occurs at low temperature start-up, Performance Plus® is formulated to protect critical transmission components in these conditions to greatly extend the life of your transmission.

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.9/19



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

Applications*

Performance Plus® has not only proven and tested to bring power and protection, it can also be utilized in a wide array of applications making it one of the most versatile products in the industry. Performance Plus® Full Synthetic Multi-Vehicle ATF can be used in the following applications:

- | | | |
|---|---|---------------------------------------|
| Acura ATF-Z1 | Hino Blue Ribbon ATF | NAG 1 (Chrysler, Jeep, Cherokee) |
| Aisin Warner JWS 3309 (T-IV) & JWS 3324 (WS) | Honda ATF-Z1 (except in CVTs) | Nissan Matic Fluid C |
| Allison C-3 & C-4 | Honda DW-1 | Nissan Matic Fluid D |
| ATF RED 1, RED 1K | Hyundai/Kia SP-IV | Nissan Matic Fluid J |
| Audi 5 HP LT71141 (ZF 5 HP 18FL/19FL/24A) | Hyundai/Kia SP-IV M | Nissan Matic Fluid K |
| Audi G 052 162-A1/A2 | Hyundai/Kia SP-IV-RR | Nissan Matic Fluid S |
| Audi G 055 025 A2 (JWS 3309) | Hyundai/Kia SP-III | Opel (all vehicles) |
| BMW JWS 3309 (T-IV) | Hyundai/Kia Dex-II/ SP-II | Peugeot ZF 4HP20 |
| BMW LA2634 | Hyundai/Kia JWS 3314 | Porsche ZF 5HP19FL, ZF 5HP20, LT71141 |
| BMW LT71141 (ZF 5 HP 18FL/19FL/24A) | Hyundai/Kia JWS 9683 | Porsche ATF 3403-M115, |
| BMW ZF 5HP18FL, 5HP24, 5HP30 | ISUZU BESCO ATF-II | Porsche T-IV (JWS 3309) |
| BMW 7045E | ISUZU BESCO ATF-III | Saab T-IV (JWS 3309) |
| BMW ETL-8072B | Jaguar ATF 3403 M115, ATF 3403-M115, | Saab 93 165 147 |
| BMW MINI | Jaguar ATF LT71141, ZF 5HP24 | Saturn T-IV (JWS 3309) |
| CAT TO-2 | Jaguar JLM20238 | Scion (all vehicles) |
| Chrysler ATF+, +2, +3 (MS 7176E) | Jaguar ATF 3403 JLM20238, | Shell 3403, M115, LA 2634 |
| Chrysler/Dodge MOPAR AS 68 RC (T-IV), JWS 3309 | JASO M315-2013 1A-LV | Subaru ATF |
| Daewoo LT 71141 | JEEP ATF+3 | Subaru ATF 5AT |
| Daihatsu AMMIX ATF D-II | Lexus JWS 3309 | Subaru DEXRON®-II |
| Daihatsu AMMIX ATF D-III SP | KIA ATF SP-II, SP-III, SP-IV, SP-IVM, Red 1 | Subaru ATF, ATF HP |
| Esso LT 71141 | Mazda ATF D-II | Suzuki AT OIL 5D06 |
| FIAT T-IV type, JWS 3309 | Mazda ATF M-III | Suzuki ATF 2326 |
| Ford MERCON® | Mazda ATF M-V | Suzuki ATF 2384K |
| Ford MERCON® LV (FF-WSS-M2C-938A/SF, XT-10 QLV) | Mazda ATF FZ | Suzuki JWS 3309 |
| Ford FNR5 | Mazda ATF F-1 | Suzuki ATF 3314 |
| Ford M2C138CJ | Mazda ATF S-1 | Suzuki ATF 3317 |
| Ford M2C166H | Mazda ATF N-1 | Texaco 7045-E |
| Ford WSS M2C 138CJ, 166H | MAZDA ATF 3317 | Texaco 8072B |
| Ford WSS M2C 922A1, 924A (XT-8-QAW) JWS 3309 | MB 236.1 | Texaco N402 |
| Fuso ATF-II | MB 236.2 | Toyota ATF D-II |
| Fuso ATF-SPIII | MB 236.3 | Toyota ATF D-III |
| Fuso ATF-A4 | MB 236.5 | Toyota ATF T-III |
| GM9986195 (Aisin AW, JWS 3309) | MB 236.6 | Toyota ATF T-IV |
| GM TASA | MB 236.7 | Toyota ATF WS |
| GM DEXRON®-II | MB 236.8 | Vickers M2950-S, I-286-S |
| GM DEXRON®-IID | MB 236.9 | Voith 55.6335.xx (G607) |
| GM DEXRON®-IIE | MINI COOPER T-IV | Volvo CE 97340 |
| GM DEXRON®-IIIG | Mitsubishi Diaqueen SK | VW 5 HP (ZF 5 HP 30) |
| GM DEXRON®-IIIH | Mitsubishi Diaqueen SP-II | VW 5HP (18FL, 30) |
| GM DEXRON®-VI | Mitsubishi Diaqueen SP-III | VW 5HP (19FL, 24A) |
| | Mitsubishi Diaqueen SP-IV | VW G-055-025 A2 (JWS 3309) |
| | Mitsubishi Diaqueen AW | VW TL 521 62 |
| | Mitsubishi Diaqueen J2 | ZF all 3 & 4 speed transmission |
| | Mitsubishi Diaqueen J3 | ZF TE-ML 09 |
| | Mitsubishi Diaqueen ATF PA | ZF TE-ML 09X |
| | | ZF TE-ML 11A, 11B |

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.9/19