



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

UNIVERSAL TRACTOR FLUID

Performance Plus® Universal Tractor Fluid is a premium transmission / differential / hydraulic fluid with superior anti-wear properties recommended for use in power shift transmissions, hydrostatic manual transmissions, differentials, final drives, wet brakes, clutches, power steering, and PTO drives commonly used in farm and construction equipment, off-highway vehicles, and industrial tractors. Our product formulation is built on the foundation of Performance Plus Oils are highly refined hydro-treated, high VI base oils.

PERFORMANCE PLUS PROPERTIES

Kinematic Viscosity cSt @ 40°C cSt @ 100°C	60.1 9.4
Viscosity Index	138
Brookfield Viscosity cP @ -35°C	23,000
Specific Gravity 15.6°C (60°F)	0.862
Flash Point, °C (°F)	226 (439)
Pour Point, °C (°F)	-42 (-44)
Color (ASTM)	L 3.0

Note: Values shown above are representative of current production and may vary within modest ranges

Approvals and Specifications

Performance Plus® Universal Tractor Fluid are suitable for use in the following specifications:

Vickers 35VQ25	Allison C-3
Ford New Holland M2C-41B	Allison C-4
Ford New Holland M2C-48B	Cat TO-2
Ford New Holland M2C-48C	Deere J20A
Ford New Holland M2C-86C	Deere J20C
Ford New Holland M2C-134D	Kubota B6

Since Performance Plus Universal Tractor Fluid meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable*):

Caterpillar	Case IH
John Deere	Volvo
New Holland	Mahindra
Komatsu	Terex
Liebherr	Hitachi
Mazak	Toyota
Okuma	Haas
Doosan	Mitsubishi
Mag	Mori Seiki

*Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

UNIVERSAL TRACTOR FLUID


Features and Benefits: Power, Protection and Performance are required in today’s modern tractors, and those who demand the very best demand Performance Plus Universal Tractor Fluid. Tested, proven, and trusted quality are why Performance Plus products are changing the game. Additionally, Performance Plus Universal Tractor Fluid offers:

- Enhanced low temperature performance
- Excellent anti-wear properties
- Designed to reduce sludge and deposits
- Extensive Seal and O-ring material compatibility
- Additives to improve Cleanliness

- Lubricates components even in extreme cold conditions
- Reduces maintenance downtime and costs
- Maximizing performance, power and protection
- Reducing any excessive leaks
- Providing protection between drain intervals

Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.


Brookfield Viscosity

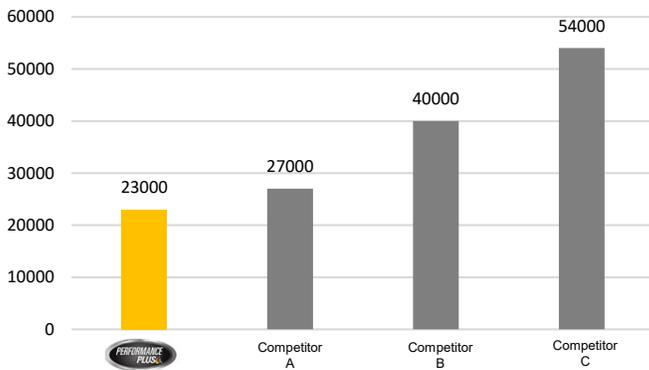

Performance Plus® delivers superior lubrication flow to vital components faster and more efficiently thus significantly reducing critical engine wear during cold temperature operation.

Water Control

Performance Plus® Universal Tractor Fluid is formulated with specialty demulsifying additives, these enhance the fluid’s ability to manage water contamination.

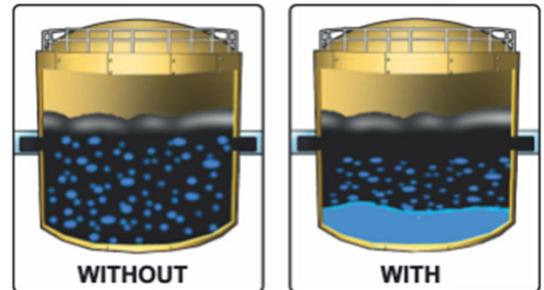

Our blend of additives will force any water contamination to the system to settle to the bottom of the sump so it can be easily drained off to protect the system.

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen’s used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.9/19